


Corner Guard Stainless

INSTALLATION INSTRUCTIONS

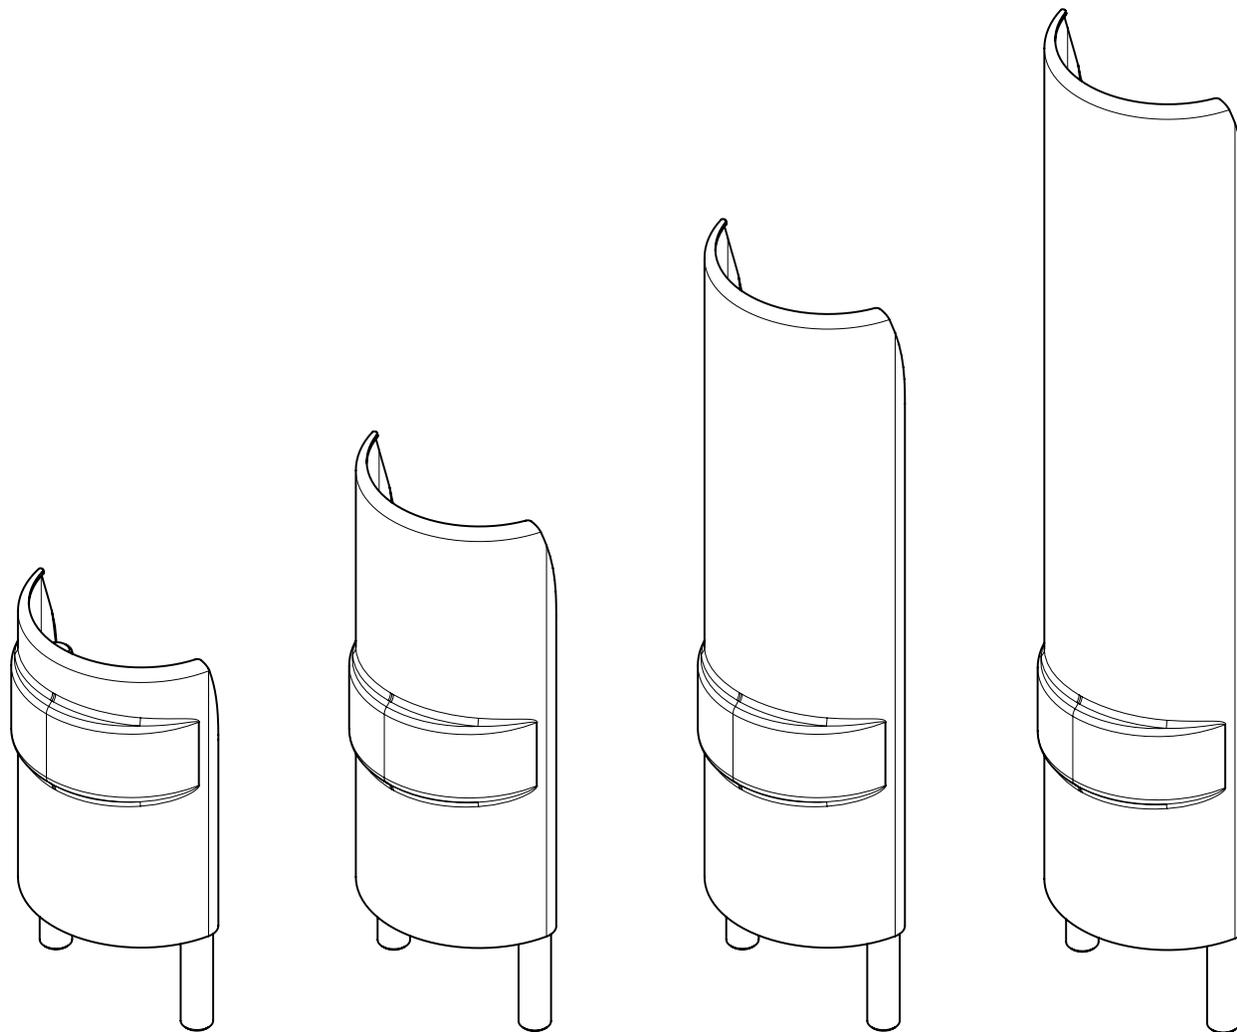


Tools Required

Hammer Drill with 1" Carbide Bit
Tape Measure
Pencil
Rubber Mallet
Straight Edge

Brush and Dust Pan
Chalk Line
Carpenter or Framing Square
Plumb Bob

In the Box

Adjustable Corner Guard
Anchor Flange Kit



Questions? Call McCue Customer Care at 800.800.8503


©2013 McCue Corporation, 13 Centennial Drive, Peabody, MA 01960, USA. JUL 2013

mccue.com

1 Layout

Drop a plumb line from the outer most edge of the case (Figure A.) Make a pencil mark at the plumb line point. Measure 2-1/8" away from the plumb line and snap a chalk line that is 2-1/8" away from the case or wall (Figure B.)


Set the corner guard over the chalk line in front of the corner that it will protect. Center the product so that the peak of the corner aligns with the center of the guard.

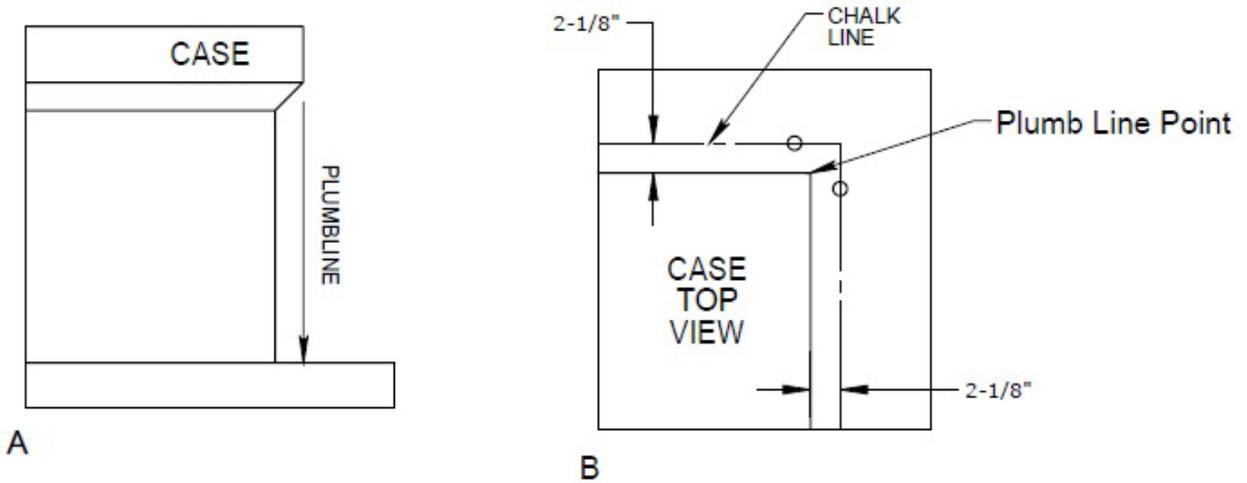

2 Marking and Drilling Holes


Place the corner guard in the proper position (See Template 1 for placement guide on the last page) and trace a circle around the base of each leg with a pencil to mark two circles on the floor. Drill a hole that is 1" diameter and 3-1/4" deep for each marked circle. Remove dust and debris from holes.

See Hole Template Positioning Guide on last page.

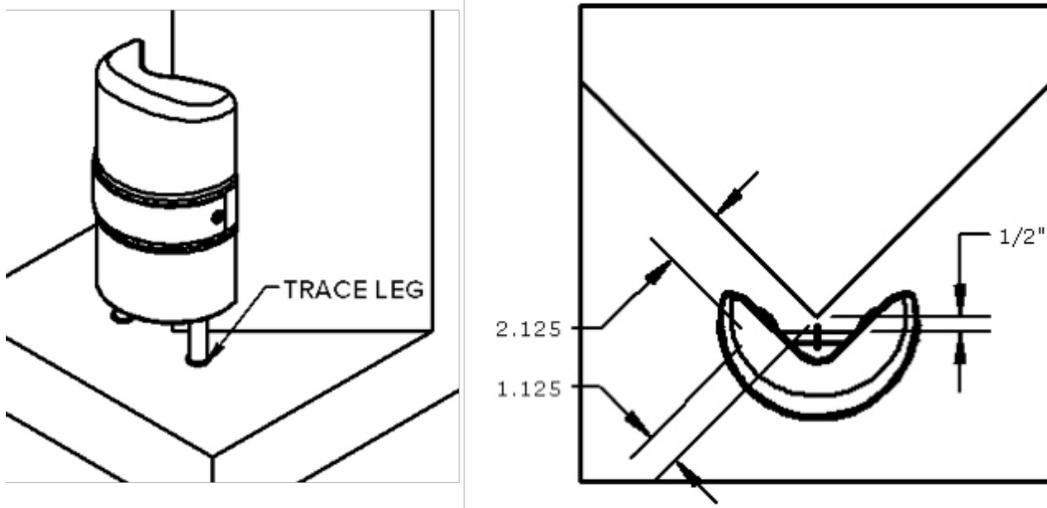


3 Installing the Flange Anchor Sleeve

1. Insert the flange anchor assembly into the holes.
2. Use a rubber mallet to strike the flange anchors until they are secure in the floor holes.
3. Be sure the top of stainless steel sleeve is fully seated on top of the plastic flange anchor.

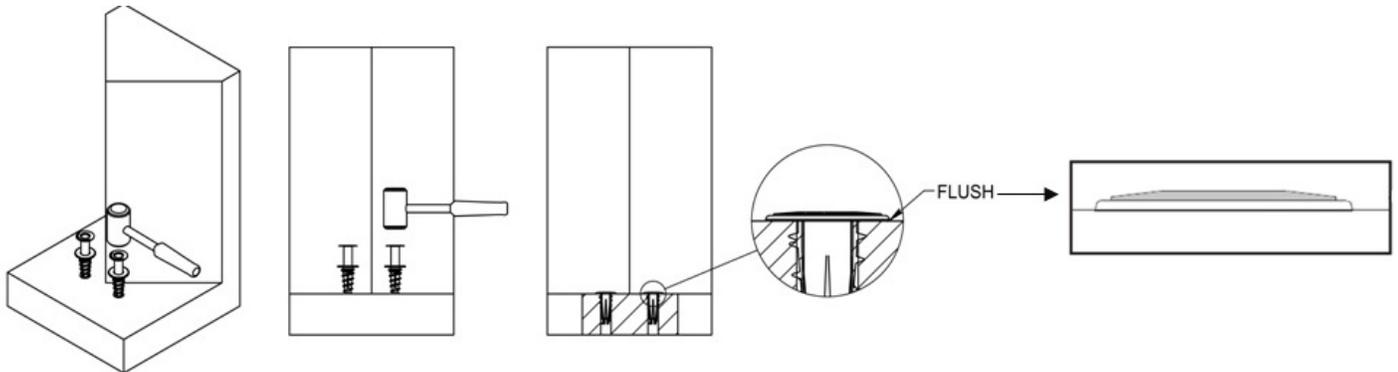



Epoxy Installation Option: If you wish to use epoxy, fill about half the floor hole with Simpsons Acrylic Anchoring Adhesive. Remove the plastic sleeve from the anchor flange assembly and push the metal sleeve into the hole. The top of the flange should fit flush against the floor. Let anchoring adhesive dry and chip away excess adhesive.

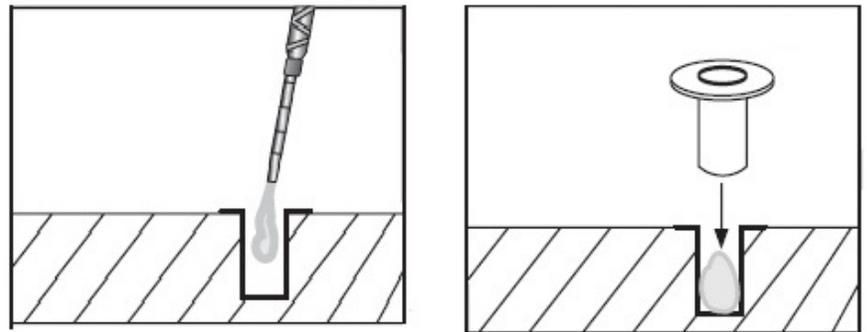

4 Setting Corner Guard Into Floor

Insert the corner guard legs into the anchor flange assemblies that have been installed in the floor. Important: see next step for adjusting legs to fit and slide into the holes. Push the guard down so that it is fully seated into the flange sleeves.


Note: the bottom edge of CartStop Adjustable Corner Guard will sit about 1/4" above the floor when installed.

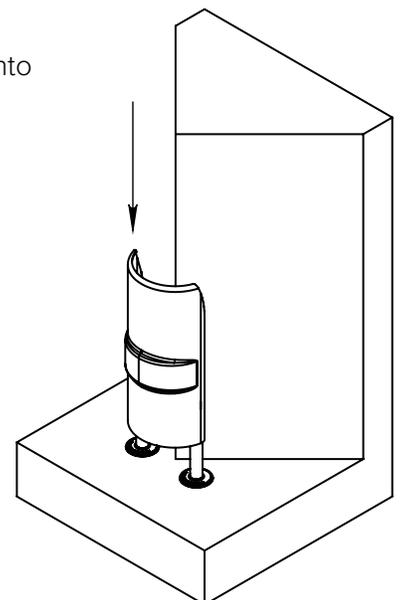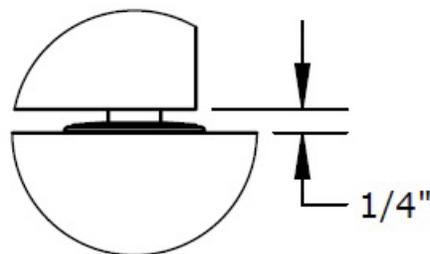



5 Leg Adjusting Option (if needed)

If adjustment is needed, use the attached wrench on the back to adjust legs inward or outward to fit the center to center dimension. Lock wrench to stud by pushing the wrench into the flat area of the stud. Rotate level arm up to move legs inward or rotate level arm down to move legs outward. Unlock wrench by pulling away and letting rest.

TIP: to fully lock guard into place, once situated in Anchor flange sleeves, rotate the level arm in either direction to ensure a snug fit.

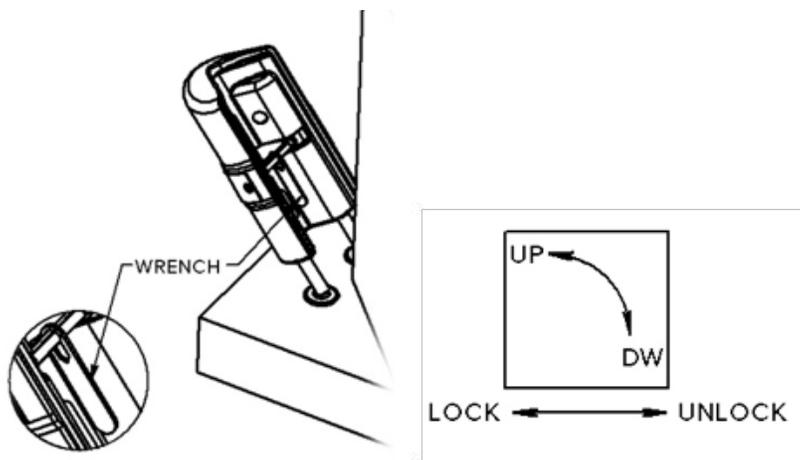

6 Installation is complete

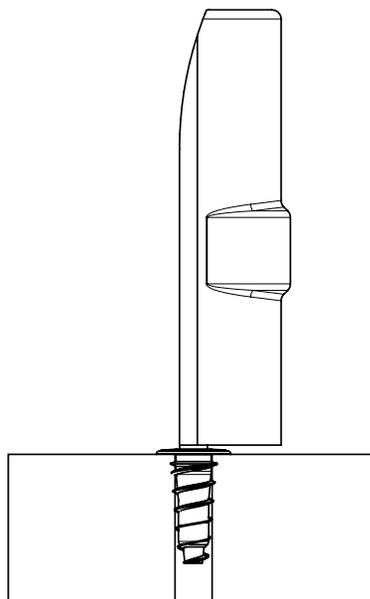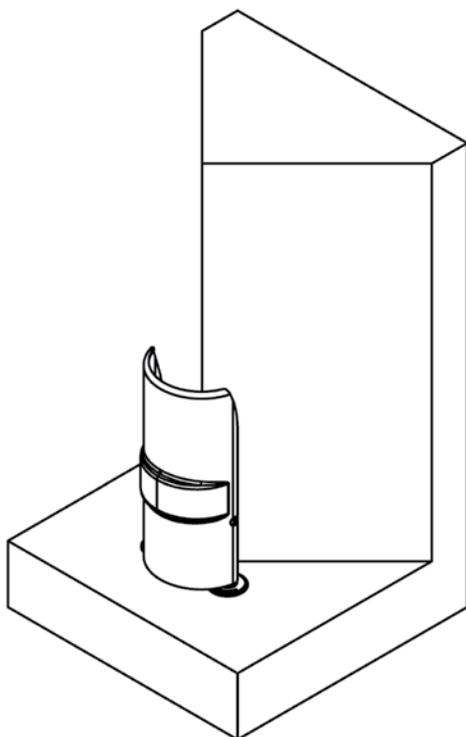

Hole Template Positioning Guide

